

Antenna JRMC – 400 – 17/18 is designed for microwave links at the frequency band 17 and 18 GHz. Precise performance with deep reflector dish complies with standard ETSI class 3, FCC Cat B2.

Electrical parameters:

Frequency range 17.1 – 19.7 GHz

Gain - Low frequency $34.6 \pm 1 \, dBi$

Gain - High frequency $35.6 \pm 1 \, dBi$

Front to back ratio ≥ 64 dB

Beamwidth -3 dB $2.6^{\circ} \pm 0.5^{\circ}$

Return loss ≥ 17 dB

Polarization Linear, vertical/horizontal

US FCC Cat. B2

Electrical Compliance Class 3 ETSI EN 302-217-4-2 v1.5.1

Grade B ACMA - RALI FX3

Mechanical parameters:

Parabola Ø 400 mm, Aluminium alloy

Radome UV steady plastic ABS

Input / output Circle waveguide Ø 11 mm

Installation for mast Ø 40 - 120 mm

Operating wind load 180 km/h (112 mph)

Survival wind load 240 km/h (149 mph)

Weight of antenna 2.3 kg (5.1 lbs.)

> of holder 2.4 kg (5.3 lbs.)

480 x 475 x 250 mm / 6.3 kg (13.9 lbs.) **Shipping dimensions**




Usage:


- deep parabola for better parameters
- easy to assembly: first the holder and then the antenna only by 2 screws
- fine setting elevation (of gradient) and azimuth ± 20°
- extreme wind stability

The antenna is supplied with a holder that allows easy mounting on a mast. The holder can be installed separately on the mast. Subsequently, you can simply hang up the antenna with microwave unit into it. The holder allows precise adjustment in both directions. Ready for right and left side mounting.




Measurement of radiation pattern:

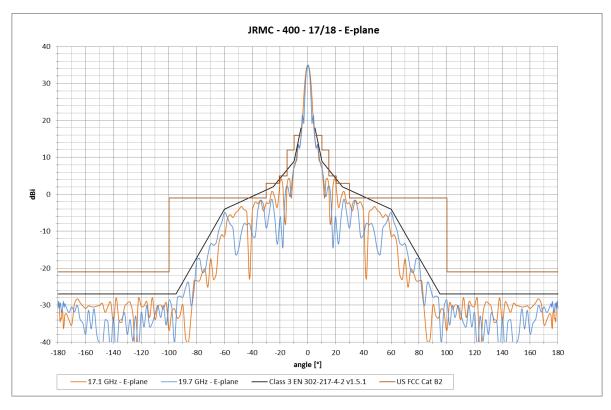


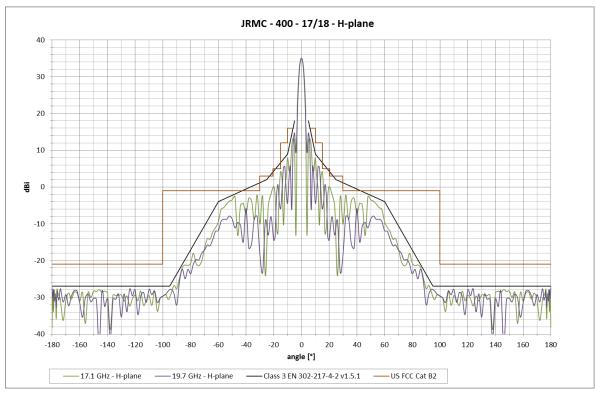




Outline:

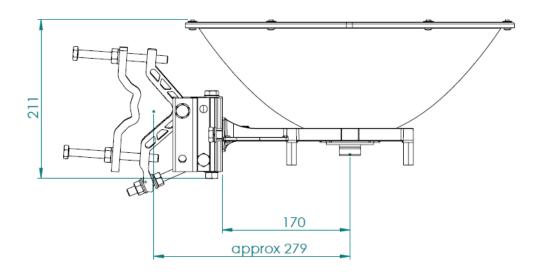

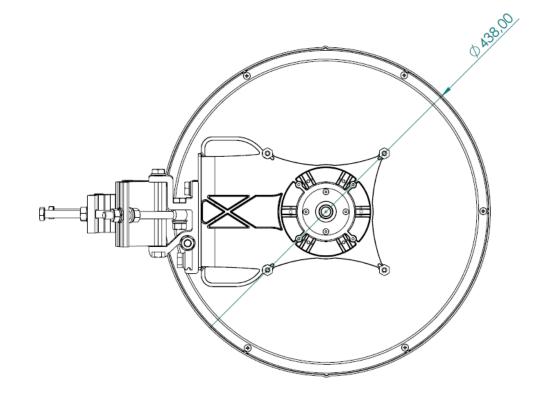



Wind loading:

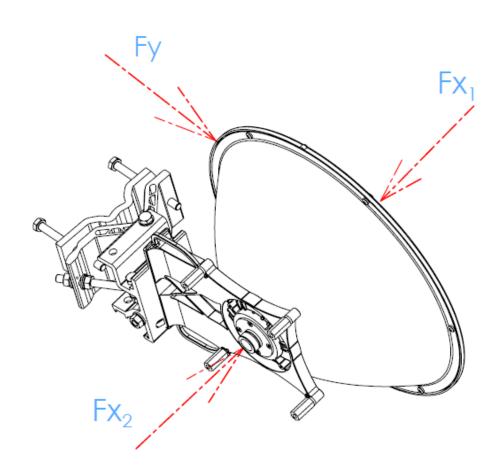

Wind loading 200 km/h [125 mph]

Direction	Force [N]	Force [lbf]
Fx ₁	344	77,3
Fx ₂	313	70,3
Fy	17	3,8